



单排交叉滚柱式回转支承 (797 系列)
Single row cross roller slewing bearing (797 series)

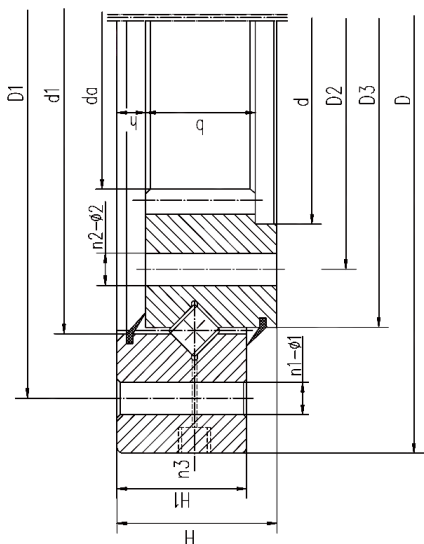

内齿
Internal Gear

轴承型号 Bearing type	外形尺寸 Boundary dimensions			安装孔尺寸 Mounting hole diameter						结构尺寸 Structure dimensions						齿轮参数 Gear parameters					质量 Mass kg				
	D	d	H	D1		D2	n1	n2	φ 1 mm	φ 2 mm	mm			D3	d1	H1	h	n3	φ 3 mm	m		da	Z	b mm	X
内齿式 Internal gear type	1000	760	95	956	800	24	24	20	20	878	882	82	15	4	M10X1	8	718	91	70	0.35					206
	1180	870	115	1125	920	18	18	26	26	1023	1027	100	15	2	M8x1	8	828.8	105	90	0.3					374
	1170	875	95	1120	930	24	24	22	22	1018	1022	82	10	4	M10X1	8	830	105	70	0.35					297
	1200	955	90	1160	1000	36	18	18	18	1088	1092	76	10	4	M8x1	8	908	115	72	0.3					245
	1200	1010	90	1160	1041	36	20	22	M20	1088	1092	76	10	2	M8x1	10	962	97	72	0.6					199
	1200	1010	90	1160	1041	36	20	22	M20	1088	1092	76	10	2	M8x1	10	962	97	72	0.6					199
	1595	1278	120	1535	1335	36	36	26	26	1428	1432	106	14	6	M10X1	12	1221	103	90	0.35					585
	1715	1400	110	1660	1460	40	40	26	M24	1558	1562	95	15	4	M10X1	10	1330	135	90	0					587
	2420	200	160	2350	2070	48	48	33	M30	2207	2213	140	20	6	M10X1	14	1913	138	120	0.3					1607
	2670	2240	160	2600	2320	54	54	35	M36	2457	2463	140	20	6	M12X1.25	16	2154.5	136	120	0.3					1798
3-940G	2800	2300	208	2710	2390	42	48	38	M36	2535	2545	180	18	6	M10X1	20	2162.75	110	175	0					2756
2797/2680G	3325	2680	300	3242	2754	32	32	33	33	2996	3000	270	30	4	M16X1.5	16	2592	164	180	0					6320
2797/2680GY	3325	2680	300	3242	2754	48	48	33	33	2996	3000	270	30	4	M16X1.5	16	2592	164	180	0					6320
2797/2680GK	3325	2680	300	3242	2754	32	32	33	33	2996	3000	270	30	4	M16X1.5	16	2592	164	180	0					6641
3-943G2	3850	3322	200	3720	3420	60	60	45	45	3568	3572	180	20	12	Z1/4in	22	3206	147	158	0.35					4520

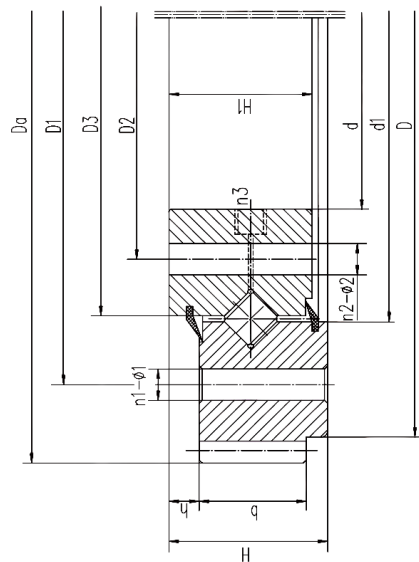


外齿
External Gear

轴承型号 Bearing type	外形尺寸 Boundary dimensions			安装孔尺寸 Mounting hole diameter						结构尺寸 Structure dimensions						齿轮参数 Gear parameters					质量 Mass kg	
	D	d	H	D1	D2	n1	n2	φ 1 mm	φ 2 mm	D3	d1	H1	h	n3	φ 3 mm	m	Da	Z	b	X		
外齿式 External gear type	1792/885	1056	885	83	1032	925	16	16	M16	17.5	986	988	75	12.5			8	1096	135	62.5	0	172
	E1792/885	1056	885	83	1032	925	16	16	M16	17.5	986	988	75	12.5			8	1096	135	62.5	0	172
	E1792/885K	1056	885	83	1032	925	16	16	M16	17.5	986	988	75	12.5	3	M10X1	8	1096	135	62.5	0	172
	1797/885G	1150	885	115	1115	935	16	16	18	18	1023	1027	100	15	4	M8x1	5	1180	234	80	0	330
	1797/1100G	1415	1100	115	1345	1160	24	18	21	21	1253	1255	100	15	4	M12X1.25	6	1452	240	84	0	497
	1798/1100G2	1400	1100	140	1352	1160	26	26	24	26	1260	1264	126	21	4	M10X1	14	1477.28	104	90	-0.24	642
	1798/1100G2K	1400	1100	145	1352	1160	26	26	24	26	1260	1264	131	26	4	M10X1	14	1477.28	104	90	-0.24	644
	1797/1250G2	1548	1250	148	1512	1297	16	16	25	25	1403	1407	122	20	4	M10X1	12	1608	132	100	0	661
	1797/1278G2	1595	1278	120	1535	1335	36	36	26	26	1428	1432	105	15	4	M10X1	12	1655.46	134	90	1.15	597
	1797/1300G2	1705	1300	165	1644	1360	24	24	32	32	1504	1508	134	31	4	M10X1	14	1783.6	126	85	-0.3	1023
	1792/1400G	1715	1400	110	1660	1460	42	42	26	26	1558	1562	95	17	4	M12X1.25	12	1780.8	147	78	-0.3	597
	1792/1400G2	1715	1400	110	1660	1460	42	42	26	26	1558	1562	95	17	4	M12X1.25	12	1881.6	147	78	-0.3	597
	1792/1400G2K	1715	1400	110	1660	1460	42	42	26	26	1558	1562	95	17	4	M12X1.25	12	1780.8	147	78	-0.3	597

轴承型号 Bearing type	外形尺寸 Boundary dimensions			安装孔尺寸 Mounting hole diameter						结构尺寸 Structure dimensions						齿轮参数 Gear parameters				质量 Mass kg			
外齿式 External gear type	D	d	H	D1		D2	n1		φ 1		φ 2	D3	d1	H1	h	φ 3		m	Da	Z	b	X	
	mm			mm		mm	mm		mm		mm	mm		mm		mm			mm		mm		
1797/1460G2	1800	1460	125	1735	1525	32	36	26	26	26	1633	1637	110	10	4	M10X1		14	1881.6	133	95	-0.3	828
1797/1460G2K		1460	125	1735	1525	32	36	26	26	26	1633	1637	110	10	4	M10X1		10	1880	186	115	0	845
1797/1916G2		1916	150	2245	1980	42	42	34	34	34	2113	2117	130	15	3	M10X1		18	2415.6	133	135	-0.4	1597
1797/2100G2	2600	2100	180	2540	2200	48	48	32	32	32	2368	2372	158	22	8	M10X1		18	2700	148	130	0	2395
1797/2100G2K	2600	2100	180	2540	2200	48	48	32	32	32	2368	2372	158	22	8	M10X1		18	2700	148	130	0	2392
1797/2460G2		2460	220	2930	2560	30	30	33	33	34	2785		185	20	30	M12X1.25		14	3108	220	200	0	4091
1797/2460G2U		2460	220	2930	2560	30	30	33	33	34	2745	2747	185	20	30	M12X1.25		14	3108	220	200	0	4091
1797/2460G2K		2460	220	2930	2560	30	30	33	33	34	2875		185	35	15	ZG1/4in		14	3108	220	200	0	4091
1797/2460G2K1		2460	220	2930	2560	30	30	33	33	34	2875		185	35	30	ZG1/4in		14	3108	220	200	0	4091
1797/2500G2		2500	210	2990	2630	36	36	37	37	37	2818	2822	200	10	12	M14X1.5		25	3250	128	200	0	4597
1797/2500K	2920	2500	260	3060	2622	36	36	40	40	40	2949	2916	240	60	36	ZG1/4in		18	3258	179	190	0	5407
1797/2500G2K1	2920	2500	260	3060	2622	36	36	40	40	40	2949	2916	240	60	36	ZG1/4in		18	3258	179	190	0	5407
1797/2600G		2600	200	3050	2700	60	60	35	35	35	2868	2872	180	20	6	M12X1.25		20	3232.8	160	180	-0.18	3936
1797/2600G2		2600	200	3050	2700	60	60	35	35	35	2868	2872	180	20	6	ZG1/4in		20	3232.8	160	180	-0.18	3936
1797/2600G2K		2600	200	3050	2700	60	60	35	35	35	2868	2872	180	20	4	14		20	3232.8	160	180	-0.18	3936
1797/2600G2K1		2600	200	3050	2700	60	60	35	35	35	2868	2872	180	20	8	M10X1		20	3232.8	160	180	-0.18	3936
1797/2635G	3332	2635	270	3240	2755	36	36	42	42	42	2998	3002	240	45	6	M12X1.25		20	3440	170	200	0	5937
1797/2635G	3332	2635	270	3240	2755	36	36	42	42	42	2998	3002	225	30	12	ZG1/4in		20	3440	170	200	0	5937
1797/3230G	3970	3230	240	3820	3350	52	54	37	37	37	3578	3582	220	20	9	M12X1.25		25	4100	162	200	0	7612
1797/3230GY	3970	3230	240	3820	3380	52	36	37	37	37	3578	3582	220	20	4	M12X1.25		25	4100	162	200	0	7612
1797/3230G2	3970	3230	240	3820	3350	52	54	37	37	37	3578	3582	220	20	9	M12X1.25		25	4100	162	200	0	7613
1797/3230G2K	3970	3230	240	3820	3350	52	54	37	37	37	3578	3582	220	20	8	14		25	4100	162	200	0	7613
1797/3230G2K2	3970	3230	240	3820	3350	52	54	37	37	37	3578	3582	220	20	18	M12X1.25		22	4092	184	200	0	7804
1797/3230G2K3	3940	3230	240	3820	3350	52	54	37	37	37	3578	3582	220	20	9	M12X1.25		20	4080	202	200	0	7302
1797/3230G2Y	3970	3230	240	3820	3380	52	36	37	37	37	3578	3582	220	20	4	M12X1.25		25	4100	162	200	0	7613
1797/3230G2Y2	3970	3230	240	3820	3380	52	36	37	37	37	3578	3582	220	20	4	M12X1.25		25	4100	162	200	0	7613
1797/3230G2Y3		3230	240	3820	3380	52	36	37	37	37	3578	3582	220	20	4	M14X1.5		25	4100	162	220	0	7686
1797/3230GK4	3970	3230	240	3820	3380	52	68	37	37	37	3578	3582	220	20	18	M14X1.5		25	4100	162	200	0	7613
1797/3230GK5	3970	3230	240	3820	3350	52	54	37	37	37	3578	3582	220	20	4	M12X1.25		25	4100	162	200	0	7613
1797/3230G2Y3K		3230	240	3820	3380	52	36	37	37	37	3578	3582	220	20	4	M12X1.25		25	4100	162	220	0	7686
1797/3760G	4220	3760	240	4160	3840	48	48	32	32	32	3996	4004	210	55	4	M14X1.5		14	4326	307	135	0	8246
1797/4250G	4940	4250	250	4840	4350	72	72	48	48	48	4598	4602	225	25	9	M16X1.5		30	5082	168	200	-0.3	8654

无齿
Non Gear

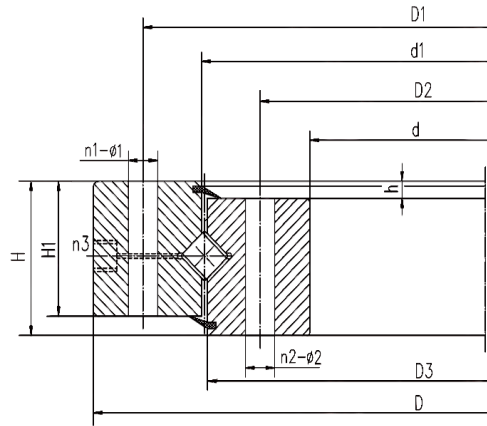

轴承型号 Bearing type	外形尺寸 Boundary dimensions			安装孔尺寸 Mounting hole diameter						结构尺寸 Structure dimensions						质量 Mass kg
无齿式 Non gear type	D	d	H	D1	D2	n1	n2	φ 1 mm	φ 2 mm	D3	d1	H1	h	n3	φ 3	
	mm			mm				mm	mm	mm					mm	
79764	550	320	85	515	365	12	8	17	18	438	442	75	10	-	-	85.6
797/600G2	900	600	125	848	690	30	29	26	M24	750	754	105	15	3	M10X1	246
797/670	907	670	85	870	730	12	8	M16	18	808	812	75	10	-	-	170
797/700G	1000	700	140	940	770	24	24	M20	22	879	882	130	20	4	M10X1	370
797/845G2	1150	845	130	1100	895	24	24	22	22	1024	1030	105	10	6	M6	393
797/870G	1180	870	115	1125	920	18	18	28	28	1023	1027	100	15	2	M8x1	355
797/870K	1180	870	115	1125	920	18	18	28	28	1023	1027	100	15	2	M10X1	355
797/870G2K1	1180	870	115	1125	920	18	18	28	28	1023	1027	100	15	2	M10X1	355
797/962G2	1200	962	90	-	-	-	-	-	-	1088	1092	76	10	-	-	224
792/1000G2	1270	1000	100	1220	1050	36	36	19	19	1132	1138	85	15	4	M10X1	303
792/1000G2K	1270	1000	100	1220	1050	36	36	19	19	1132	1138	85	15	3	9	303
792/1000G2K1	1270	1000	100	1220	1050	36	36	19	19	1132	1138	85	15	-	-	303
792/1000G2K2	1270	1000	100	1220	1050	36	36	19	19	1132	1138	85	15	-	-	303
797/1060G2	1400	1060	120	-	-	-	-	-	-	1248	1252	120	-	-	-	596
797/1200G2	1520	1200	90	-	-	-	-	-	-	1356	1364	90	-	-	-	504
792/1250G2	1700	1250	155	1650	1330	24	24	26	26	1446	1450	140	10	6	M10X1	1103
797/1250G2	1608	1250	148	1512	1297	16	16	25	25	1403	1047	128	26	4	M10X1	743
797/1250G2K	1608	1250	148	1512	1297	16	16	25	25	1403	1047	128	26	4	M10X1	717
797/1278G2K	1660	1278	120	1535	1335	18	18	26	26	1428	1432	105	15	4	M10X1	589
797/1320G2	1715	1320	134	1337	1163		40		26	1503	1509	-	-	-	-	958
797/1370G	1840	1370	160	1770	1430	30	24	28	28	1598	1602	140	10	4	M10X1	1213
797/1380G2	1700	1380	145	1650	1440	24	24	27	27	1568	1574	140	5	6	M10X1	746
3-944G2	1680	1412	170	-	1460	-	24	-	18	1544	1548	120	25	2	M10X1	725
3-944G2K	1680	1412	170	-	1460	-	24	-	18	1544	1548	120	25	2	M10X1	723
3-944G2K1	1680	1412	185	-	1460	-	24	-	18	1544	1548	120	25	2	M12X1.25	759
797/1600G	2140	1600	145	1940	1710	48	48	26	26	1828	1832	135	10	4	M10X1	1357
797/1776G2	2210	1776	150	2105	1840	36	36	26	26	1968	1972	135	15	4	M10X1	1244
797/1860G2	2320	1860	151	2245	1980	42	42	33	33	2113	2117	150	10	6	M10X1	1772
797/1916G2	2320	1916	150	2245	1980	42	42	34	34	2113	2117	130	20	3	M10X1	1214
797/2190G	2860	2190	300	2800	2270	36	36	32	32	2530	2550	260	40	12	8	4797
797/2500G2	2980	2500	180	2910	2590	48	48	33	33	2739	2743	170	10	6	M16X1.5	2913
792/2800G	3310	2800	190	3220	2890	60	60	39	39	3050	3060	165	25	2	M10X1	2864